


ELECTROCHEMICAL CELL

Type: TC6

Description

Glass cell serves for electrochemical measurements. The analyzed solution can be thermostated by external thermostat MT1. Cell openings are designed for stirrer ST1 or mini RDE and connector KA1C.* for electrochemical sensor AC1 or classical minielectrodes WCEc, ACEc and RCEc. The device enables the measurement with inserted samples.

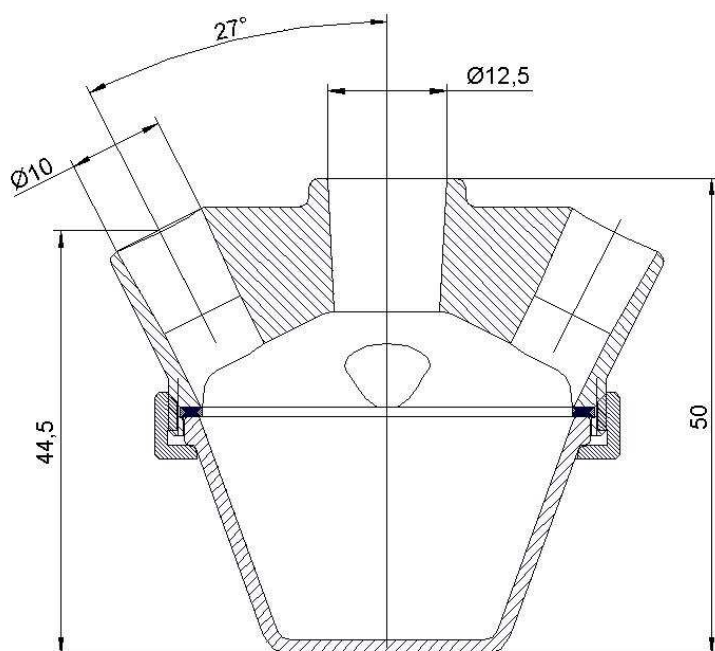

- MT1

Device Usage

- Electrochemical measurements
- Measurements with biosensors and electrochemical sensors
- Corrosion measurement

Physical Parameters

Dimensions:

Weight: 58 gms
Length: 59 mm
Height: 50 mm

Technical Parameters


Volume from 3 ml to 20 ml

Optional Equipment

- KA1C.* connector
- ST1
- Mini RDE
- WCEc
- ACEc
- RCEc

Ordering Information

- The order is specified by whole product code
- Minimum order quantity - 1 electrochemical cell
- Delivery time for standard TC6 is 4 weeks from receipt of order
- Delivery time for non-standard TC6 depends on final technical specification of order

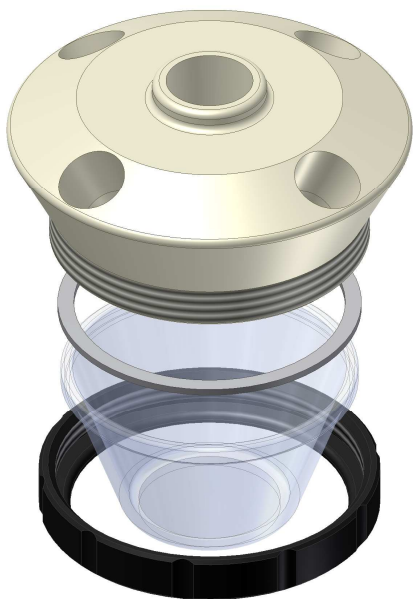

Example of Order - 5 pieces - TC6

Example of application: Measurement of biochemical activity of a sample

- 1 - Reference electrode RCEc
- 2 - Mini RDE
- 3 - Auxiliary electrode ACEc
- 4 - Sample with active surface

