

ELECTROCHEMICAL SENSOR

Type: AC1.W*.R* (*)


Description

The sensor is formed on a corundum ceramic base. On to this surface the working, the reference and the auxiliary electrodes are applied. The working and the auxiliary electrodes are made of variety of materials. At the end of the sensor there is a contacting field which is connected with the active part by the silver conducting paths which are covered by a dielectric protection layer. A bio-chemically active substance can be immobilised on the working electrode of the sensor to create a biosensor.

Physical Parameters

Dimensions:

Weight: 0.5 gms
 Length: 25.40 mm
 Width: 7.26 mm
 Thickness: 0.63 mm

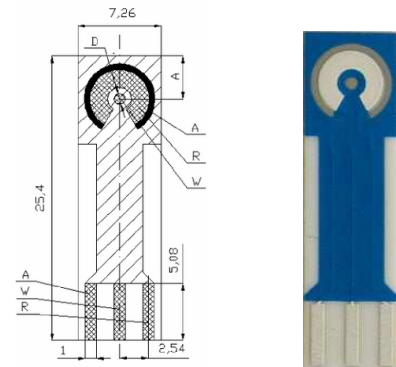

A = 4.00 ± 0.05 mm


D = 1.00 ± 0.05 mm or 2.00 ± 0.05 mm (with note $D_w = 2$ mm)

Electrode Materials are defined by:


AC1.W*.R* (*)

The asterisk is replaced by the appropriate number or letter.

A - Amperometric sensor or electrode	R - Reference electrode material
C - Corundum ceramic base	S - Silver
1 - Sensor group reference number	1 - Silver / Silver Chloride
W - Working electrode material	2 - Silver covered by AgCl
S - Alloy of Gold and Platinum	(*) - Additional Technical specification
1 - Pure Gold	H - Heating of the sensor
2 - Pure Platinum	T - Temperature sensing element
3 - Pure Silver	
4 - Graphite	

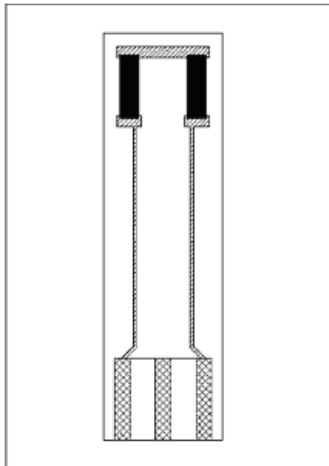

AC1.W*.R* (H)

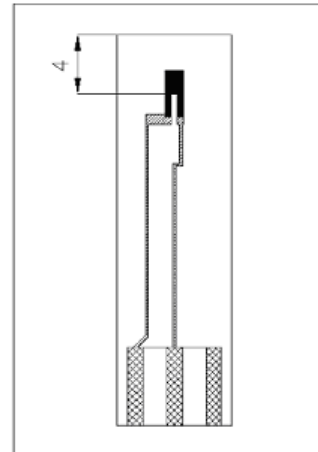

AC1.W*.R* (T)

Evaluation units

- PalmSens
- eDAQ

Connector types for AC1 sensors range

	KA1	KA1C	KA1s	KA4
AC1.W*.R*	✓	✓	✓	✓
AC1.W*.R*(H)				✓
AC1.W*.R* (T)				✓

Sensor Usage

The specific range of sensors enables the measurement of basic electrochemical and bio-electrochemical techniques.

Related patents

PV 1994-864 (13.04.1994) utility design no. 6113/94

Ordering information

- The order is specified by whole sensor description formula
- Minimum order quantity - 25 sensors
- All order quantities are to be in multiples of 25 e.g. 25, 50, 75, etc.
- Delivery time for standard AC1 sensors is 4 weeks from receipt of order
- Delivery time for non-standard AC1 sensors depends on final technical specification of order

Examples of Order

- 100 pieces - AC1.W2.R1
- 250 pieces - AC1.W3.RS (H)
- 75 pieces - AC1.W1.RS - $D_w = 2 \text{ mm}$